


COLOURMAX TERRACOTTA TEST RESULTS

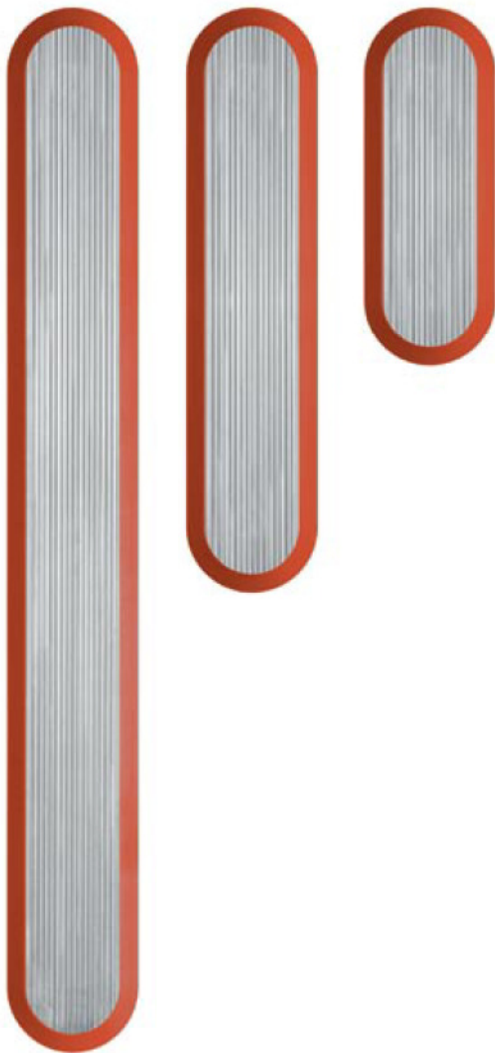

MELBOURNE
SYDNEY

CANBERRA
BRISBANE
ADELAIDE

PERTH
DARWIN
HOBART

DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 1-7 Friars Road
Moorabbin Victoria
Australia 3189
PO Box 2210
Moorabbin Victoria
Australia 3189

T 1300 793 478
F 1300 780 628
estimating@dtac.com.au
www.dtac.com.au

TACTILE GROUND SURFACE INDICATOR (DIRECTIONAL)

| | |
|-----------|------------------------------------------------------------------------------|
| RANGE | Colourmax |
| GROUP | Directional Tactile |
| MATERIAL | Extruded 316 marine grade stainless steel with terracotta outer polymer ring |
| FINISH | Mill finish |
| SUBSTRATE | As to particular product/substrate type recommendation |
| FIXING | As to particular method for product/substrate type recommendation |

FEATURES

Engraved, concentric circle design on horizontal face with terracotta outer polymer ring—available in 3 lengths for compliance.

Manufactured in Australia from extruded solid 316 marine grade stainless steel and hardwearing UV stabilised polymer

Unique integrated 'HEX' shaft design for substrate mounting (patents and design registrations applied and granted)

Tested for compliance with AS/NZS 1428.4: (1992 & 2002)

Tested for compliance with the BCA Section D clause 3.8 (TGSIs)

Tested for compliance with slip resistance requirements as detailed in HB 197 (1999)

10 year product (stainless), 5 year colour stability product warranty (polymer), 2 year installation warranty

DTAC's facility to reclaim, recycle and reinstate

SLIP RESISTANCE TESTING

Important information about slip resistance ratings: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 197: 1999 (HB 197), An Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface. As the testing for slip resistance can only currently be measured for the 25mm face of the TGSIs, the same test results for ASTD-SS Have applied to this product. (DTAC April 2009)

| | |
|--------|----------------------------------------------------------------|
| TEST | AS/NZS 4586:1999 APPENDIX A |
| TYPE | Wet Pendulum Test |
| RATING | Four S Slider = 34 |
| CLASS | Mean BPN = Class N/A |
| REPORT | (Intertile Pty Ltd test report) Available on request from DTAC |

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSIs node, see: AS/NZS 1428.4 2002 Page 51-59, appendix F. As the testing for luminance is performed only on the 25mm face of the TGSIs, (CSIRO test report 2756-5, 6 & 7B for DTAC product ASTD-SS), has been applied to this product. The colour of the outer polymer surrounding the 316 stainless steel (25mm) face has no bearing on the luminance rating. DTAC July 2008)

| | |
|--------|-------------------------------------------------------------------|
| TEST | AS 1428:4 2002 APPENDIX F |
| TYPE | Access for people with disabilities |
| RATING | Luminance Reflectance rating = Dry = 29.7/ Wet = 36.1 |
| REPORT | (CSIRO test report 2756-5, 6 & 7B) Available on request from DTAC |

COLOURMAX TERRACOTTA INSTALLATION

DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 1-7 Friars Road
Moorabbin Victoria
Australia 3189
PO Box 2210
Moorabbin Victoria
Australia 3189

T 1300 793 478
F 1300 780 628
estimating@dtac.com.au
www.dtac.com.au

TYPE 1 SUBSTRATES

STONE, MASONRY, TIMBER, VINYL




CODE CSD-SS-8x18-HEX-PF-TERRACOTTA-5

FIXING Drill and pressure fit

NOTE Any thick substrate where maximum hold is required without chemical anchoring

TYPE 2 SUBSTRATES

VITRIFIED PORCELAIN, CERAMICS, GLASS, METALS



CODE CSD-SS-8x18-HEX-PF-TERRACOTTA-5

FIXING Diamond core/pressure fit

NOTE Any thick substrate where maximum hold is required without chemical anchoring

3 AVAILABLE LENGTHS

CODE CSD-SS-8x18-HEX-PF-TERRACOTTA-2

SIZE L100 x W35 x H5 mm

CODE CSD-SS-8x18-HEX-PF-TERRACOTTA-3

SIZE L165 x W35 x H5 mm

CODE CSD-SS-8x18-HEX-PF-TERRACOTTA-5

SIZE L290 x W35 x H5 mm



Available in 3 sizes to conform to the precise installation requirements that vary from one application to the next so as ensure a safe and accessible path for all pedestrians. 'H' indicates height above surface.