


TACTILE CLASSIC LIGHT GREY POLYRESIN

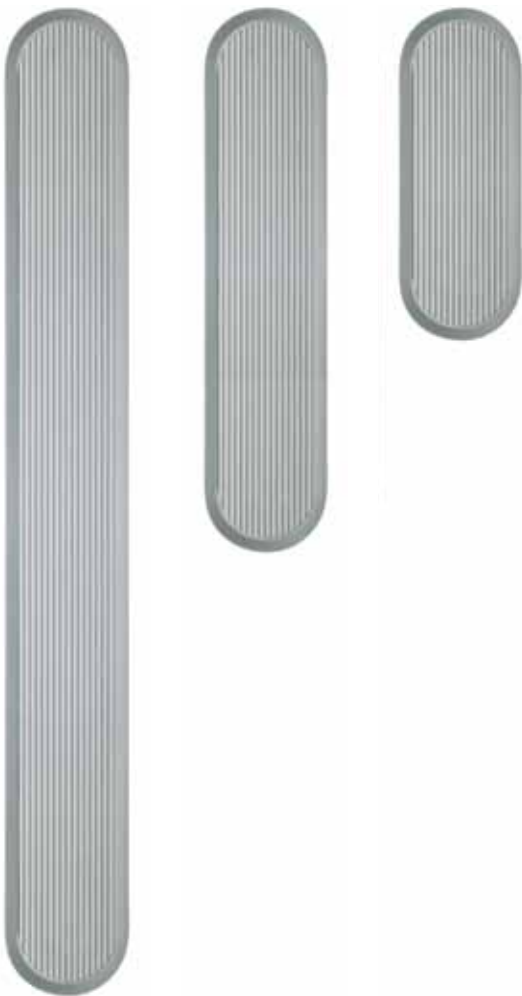

TACTILE GROUND SURFACE INDICATOR

| | |
|----------|--|
| RANGE | Polyresin Classic |
| TYPE | Directional Tactile |
| MATERIAL | Light Grey virgin and re-claimed UV and thermally stabilized high impact elastomeric based polymer |
| FINISH | Machined |

FEATURES

Moulded, grooved design on the horizontal face with a smooth moulded outer edge
Tested for compliance with AS/NZS 1428.4
Tested for compliance with the BCA Section D clause 3.8 (TGSIs)
Tested for compliance with slip resistance requirements as detailed in HB 197
2 year product warranty

SLIP RESISTANCE TESTING

Important information: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 197 (HB 197), an Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

| | |
|----------|------------------------|
| TEST | AS/NZS 4586 APPENDIX A |
| TYPE | Wet Pendulum Test |
| RATING 1 | Four S Slider = N/A |
| RATING 2 | TRRL Slider = N/A |
| CLASS | Mean BPN = Class N/A |
| REPORT | Test Report N/A |

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGS node, see: AS/NZS 1428.4, page 51-59, Appendix F. DTAC can test your substrate for luminance contrast to give you peace of mind that your DTAC project will be fully compliant to AS/NZS 1428.4.

| | |
|--------|---|
| TEST | AS/NZS 1428.4 APPENDIX F |
| TYPE | Access for people with disabilities |
| CLASS | Luminance Reflectance rating = Dry /Wet /Mean TBA |
| REPORT | [Test report] N/A |

DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 11-12 Phillip Court
Port Melbourne Victoria
Australia 3207

T 1300 793 478
F 1300 780 628

estimating@dtac.com.au
www.dtac.com.au


PO Box 5059
South Melbourne Victoria
Australia 3205

© DTAC Pty Ltd 2012

INSTALLATION - CLASSIC LIGHT GREY POLYRESIN

TYPE 1 SUBSTRATES

STONE, MASONRY, TIMBER, VINYL




CODE DIRP0702LG

FIXING Drill and pressure fit

NOTE Any thick substrate

TYPE 2 SUBSTRATES

VITRIFIED PORCELAIN, CERAMICS, GLASS, METALS



CODE DIRP0702LG

FIXING Diamond core

NOTE Any thick substrate

3 AVAILABLE LENGTHS

CODE DIRP0702LG



SIZE L100 x W35 x H5mm

CODE DIRP0703LG

SIZE L165 x W35 x H5mm

CODE DIRP0705LG

SIZE L290 x W35 x H5mm



Available in 3 sizes to conform to the precise installation requirements that vary from one application to the next so as to ensure a safe and accessible path for all pedestrians. 'H' indicates height above surface.