

COLOURMAX DARK GREY TEST RESULTS



TACTILE GROUND SURFACE INDICATOR (DISCRETE)

RANGE	Colourmax
GROUP	Warning Tactile
MATERIAL	Extruded 316 marine grade stainless steel with dark grey outer polymer ring
FINISH	Mill finish
SUBSTRATE	As to particular product/substrate type recommendation
FIXING	As to particular method for product/substrate type recommendation

FEATURES

Engraved, concentric circle design on horizontal face with dark grey outer polymer ring

Manufactured in Australia from extruded solid 316 marine grade stainless steel and hardwearing UV stabilised polymer

Unique integrated 'HEX' shaft design for substrate mounting (patents and design registrations applied and granted)

Tested for compliance with AS/NZS 1428.4: (1992 & 2002)

Tested for compliance with the BCA Section D clause 3.8 (TGSIs)

Tested for compliance with slip resistance requirements as detailed in HB 197 (1999)

10 year product (stainless), 5 year on outer ring for colour stability (polymer), 2 year installation warranty

DTAC's facility to reclaim, recycle and reinstate

SLIP RESISTANCE TESTING

Important information about slip resistance ratings: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 197: 1999 (HB 197), An Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

TEST	AS/NZS 4586:1999 APPENDIX A
TYPE	Wet Pendulum Test
RATING 1	Four S Slider = 55
RATING 2	TRRL Slider = 43
CLASS	Mean BPN = Class N/A
REPORT	(Intertile Pty Ltd test report) Available on request from DTAC

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSi node, see: AS/NZS 1428.4 2002, page 51-59, appendix F. As the testing for luminance is performed only on the 25mm face of the TGSi. CSIRO test report 2352 B for DTAC product AST-SS), has been applied to this product. The colour of the out polymer ring has no bearing on the luminance rating.

TEST	AS 1428:4 2002 APPENDIX F
TYPE	Access for people with disabilities
RATING	Luminance Reflectance rating = Dry = 29.7/ Wet = 36.1
REPORT	[CSIRO test report 2352 B] Available on request from DTAC

MELBOURNE SYDNEY	CANBERRA BRISBANE ADELAIDE	PERTH DARWIN HOBART
DTAC PTY LTD ABN 41 093 070 127	Unit 4, 1-7 Friars Road Moorabbin Victoria Australia 3189 PO Box 2210 Moorabbin Victoria Australia 3189	T 1300 793 478 F 1300 780 628 estimating@dtac.com.au www.dtac.com.au

COLOURMAX DARK GREY INSTALLATION


DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 1-7 Friars Road
Moorabbin Victoria
Australia 3189
PO Box 2210
Moorabbin Victoria
Australia 3189

T 1300 793 478
F 1300 780 628
estimating@dtac.com.au
www.dtac.com.au

TYPE 1 SUBSTRATES

STONE, MASONRY, TIMBER, VINYL



CODE CS-SS-DARKGREY-M6x16-HEX

FIXING Drill and glue


NOTE Any thick substrate where maximum anchorage is required



CODE CS-SS-DARKGREY-M6x8-HEX

FIXING Drill and glue

NOTE Any thin drillable substrate such as timber or thin stone




CODE AS-SS-DARKGREY-M8x18-HEX-PF

FIXING Drill and pressure fit

NOTE Any thick substrate where maximum hold is required without chemical anchoring

GREEN 100% recyclable, no adhesives




CODE AS-SS-DARKGREY-M6x16-HEX-OC

FIXING Drill and glue

NOTE To be used to avoid anchoring obstacles (grout lines, expansion joints etc) in thick, drillable substrate

TYPE 2 SUBSTRATES


VITRIFIED PORCELAIN, CERAMICS, GLASS, METALS



CODE CF-SS-DARKGREY

FIXING Direct stick

NOTE Any thin or thick non drillable substrate




CODE CS-SS-DARKGREY-M8x18-HEX-PF

FIXING Diamond core/pressure fit

NOTE Any thick substrate where maximum hold is required without chemical anchoring

GREEN 100% recyclable, no adhesives

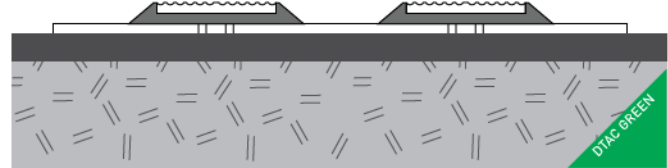

CODE CSP-SS-DARKGREY-HEX


FIXING Drill and screw or direct stick

NOTE Installed on top of, or recessed into, any non drillable substrate that cannot be removed or are too fragile including unglazing surfaces such checker plate, escalator covers or uneven floors. Custom plate sizes available

GREEN 100% recyclable, no adhesives

TYPE 3 SUBSTRATES

CARPET, CARPET TILES




CODE CSC-SS-DARKGREY-6.0-HEX

FIXING Drill and screw

NOTE Thick carpet with underlay (broad loom/natural sisal carpets). Two stage installation process

GREEN 100% recyclable, no adhesives




CODE CSC-SS-DARKGREY-3.0-HEX

FIXING Drill and screw

NOTE Thin carpet without underlay (direct stick carpet/carpet tiles). Two stage installation process

GREEN 100% recyclable, no adhesives

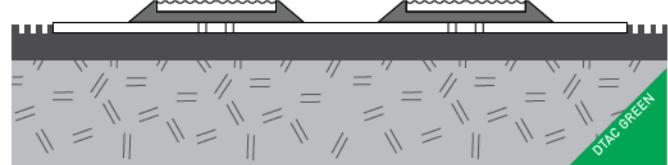

CODE CSP-SS-DARKGREY-HEX

FIXING Drill and screw

NOTE Installed on top of, or recessed into, any existing carpet substrate that cannot be removed including steel access floors. Custom plate sizes available

GREEN 100% recyclable, no adhesives