


POLYRESIN CLASSIC CUSTOM EXAMPLES TEST RESULTS

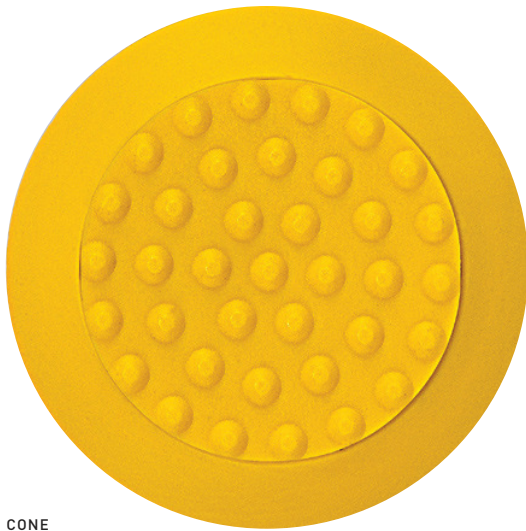

CONE

TACTILE GROUND SURFACE INDICATOR (DISCRETE)

RANGE	Polyresin Classic
GROUP	Warning Tactile
MATERIAL	Yellow virgin and re-claimed v and thermally stabilized high impact elastomeric based polymers
FINISH	Mill finish, machine finish and etched finish
SUBSTRATE	As to particular product/substrate type recommendation
FIXING	As to particular method for product/substrate type recommendation

FEATURES

Custom polymer insert with engraved, concentric cone design (as displayed) on horizontal face with smooth outer edge

Manufactured in Australia from virgin and re-claimed UV and thermally stabilized high impact elastomeric based polymers

Unique integrated 'HEX' shaft design for substrate mounting (patents and design registrations applied and granted)

Tested for compliance with AS/NZS 1428.4: [1992 & 2002]

Tested for compliance with the BCA Section D clause 3.8 [TGSIs]

Tested for compliance with slip resistance requirements as detailed in HB 197 (1999)

5 year on polymer for colour stability (polymer), 2 year installation warranty

DTAC's facility to reclaim, recycle and reinstate

SLIP RESISTANCE TESTING

Important information about slip resistance ratings: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 197: 1999 (HB 197), An Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

REPORT Available on request from DTAC


LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSi node, see: AS/NZS 1428.4 2002, page 51-59, appendix F.


REPORT Available on request from DTAC

AVAILABLE PRODUCTS

Minimum run and set-up charges apply for custom polymer inserts




CONCENTRIC CIRCLE




CONE



CUSTOM



DOT PATTERN



FIBERGLASS



GRIP TAPE

MELBOURNE SYDNEY	CANBERRA BRISBANE ADELAIDE	PERTH DARWIN HOBART
DTAC PTY LTD ABN 41 093 070 127	Unit 4, 1-7 Friars Road Moorabbin Victoria Australia 3189 PO Box 2210 Moorabbin Victoria Australia 3189	T 1300 793 478 F 1300 780 628 estimating@dtac.com.au www.dtac.com.au

POLYRESIN CLASSIC CUSTOM INSTALLATION


DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 1-7 Friars Road
Moorabbin Victoria
Australia 3189
PO Box 2210
Moorabbin Victoria
Australia 3189

T 1300 793 478
F 1300 780 628
estimating@dtac.com.au
www.dtac.com.au

TYPE 1 SUBSTRATES


STONE, MASONRY, TIMBER, VINYL



CODE	AS-PL-M8x18-HEX-PF-CUSTOM
FIXING	Drill and pressure fit
NOTE	Any thick substrate where maximum hold is required without chemical anchoring
GREEN	100% recyclable, no adhesives

TYPE 2 SUBSTRATES


VITRIFIED PORCELAIN, CERAMICS, GLASS, METALS



CODE	AS-PL-M8x18-HEX-PF-CUSTOM
FIXING	Diamond core/pressure fit
NOTE	Any thick substrate where maximum hold is required without chemical anchoring
GREEN	100% recyclable, no adhesives

TYPE 3 SUBSTRATES

CARPET, CARPET TILES



CODE	AS-PL-M8x18-HEX-PF-CUSTOM
FIXING	Drill and pressure fit
NOTE	Thin carpet without underlay (direct stick carpet/carpet tiles). Two stage installation process
GREEN	100% recyclable, no adhesives