


BRASS RIBBED TEST RESULTS

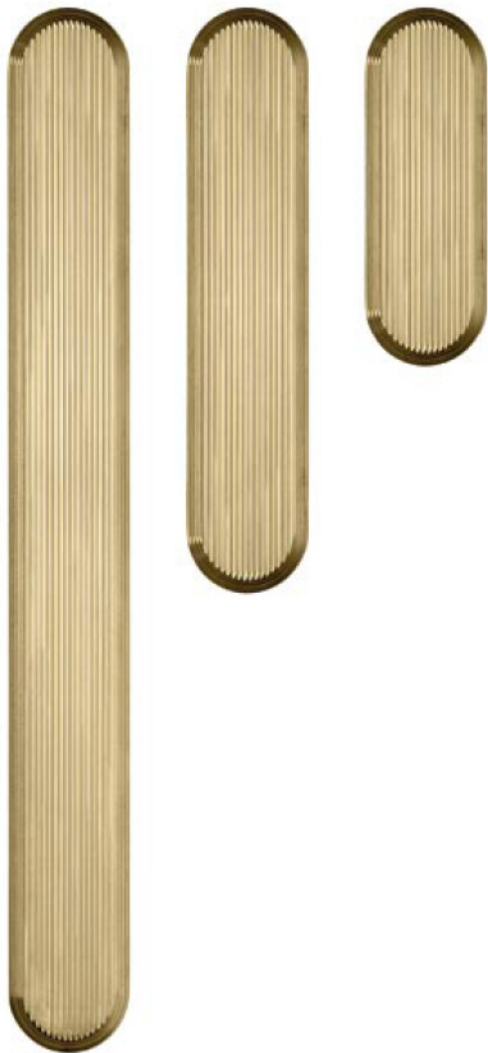

TACTILE GROUND SURFACE INDICATOR (DIRECTIONAL)

RANGE	Brass Ribbed
GROUP	Directional Tactile
MATERIAL	Extruded brass
FINISH	Mill finish
SUBSTRATE	As to particular product/substrate type recommendation
FIXING	As to particular method for product/substrate type recommendation

FEATURES

Engraved, concentric circle design on horizontal face and ribbed slip resistant bevelled edge—available in 3 lengths for compliance.

Manufactured in Australia from extruded solid 316 marine grade stainless steel

Unique integrated 'HEX' shaft design for substrate mounting (patents and design registrations applied and granted)

Tested for compliance with AS/NZS 1428.4: (1992 & 2002)

Tested for compliance with the BCA Section D clause 3.8 (TGSIs)

Tested for compliance with slip resistance requirements as detailed in HB 197 (1999)

10 year product (stainless), 2 year installation warranty

DTAC's facility to reclaim, recycle and reinstate

SLIP RESISTANCE TESTING

Important information about slip resistance ratings: To determine a classification of a slip resistance rating, see Australian Standards Hand Book 197: 1999 (HB 197), An Introductory Guide to Slip Resistance of Pedestrian Materials. This document outlines the minimum ratings of a location and situation of a pedestrian surface.

LUMINANCE TESTING

Important information: To determine a luminance contrast between a substrate and the DTAC TGSi node, see: AS/NZS 1428.4 2002 Page 51–59, appendix F. As the testing for luminance is performed only on the 25mm face of the TGSi, [CSIRO test report 2756–5, 6 & 7B], has been applied to this product. The side face or bevelled edge surround of (25mm) face has no bearing on the luminance rating [DTAC July 2008].

TEST	AS 1428:4 2002 APPENDIX F
TYPE	Access for people with disabilities
RATING	Luminance Reflectance rating = Dry = 31.0/ Wet = 34.8
REPORT	[CSIRO test report 2756-5, 6 & 7B] Available on request from DTAC

MELBOURNE
SYDNEY

CANBERRA
BRISBANE
ADELAIDE

PERTH
DARWIN
HOBART

DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 1–7 Friars Road
Moorabbin Victoria
Australia 3189
PO Box 2210
Moorabbin Victoria
Australia 3189

T 1300 793 478
F 1300 780 628
estimating@dtac.com.au
www.dtac.com.au

BRASS RIBBED INSTALLATION


DTAC PTY LTD
ABN 41 093 070 127

Unit 4, 1-7 Friars Road
Moorabbin Victoria
Australia 3189
PO Box 2210
Moorabbin Victoria
Australia 3189


T 1300 793 478
F 1300 780 628
estimating@dtac.com.au
www.dtac.com.au

TYPE 1 SUBSTRATES

STONE, MASONRY, TIMBER, VINYL




CODE ASTD-BR-M6x16-HEX-PF
FIXING Drill and pressure fit
NOTE Any thick substrate where maximum hold is required without chemical anchoring




CODE ASTD-BR-M6x16-HEX
FIXING Drill and pressure fit
NOTE Any thick substrate where maximum hold is required without chemical anchoring

TYPE 2 SUBSTRATES

VITRIFIED PORCELAIN, CERAMICS, GLASS, METALS



CODE ASTD-BR-M6x16-HEX-PF
FIXING Diamond core/pressure fit
NOTE Any thick substrate where maximum hold is required without chemical anchoring



CODE ASTD-BR-M6x16-HEX
FIXING Diamond core/pressure fit
NOTE Any thick substrate where maximum hold is required without chemical anchoring

3 AVAILABLE LENGTHS

CODE ASTD-BR-M6x16-HEX-2
SIZE L100 x W35 x H5 mm



CODE ASTD-BR-M6x16-HEX-3
SIZE L165 x W35 x H5 mm



CODE ASTD-BR-M6x16-HEX-5
SIZE L290 x W35 x H5 mm



Available in 3 sizes to conform to the precise installation requirements that vary from one application to the next so as ensure a safe and accessible path for all pedestrians. 'H' indicates height above surface.